
Transil™, transient voltage surge suppressor (TVS)


Datasheet – production data

Features

- Peak pulse power: 5000 W (10/1000 μ s)
- Stand-off voltage range from 10 V to 180 V
- Unidirectional and bidirectional types
- Low clamping factor
- Fast response time
- UL497B, file number: QVGQ2.E136224

Description

Transil diodes provide high overvoltage protection by clamping action. Their instantaneous response to transient overvoltages makes them particularly suited to protect voltage sensitive devices such as MOS Technology and low voltage supplied ICs.

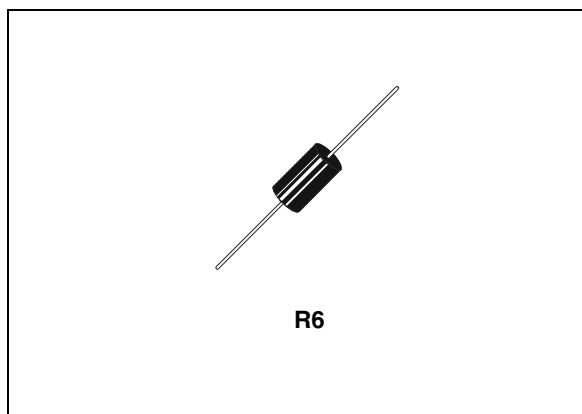

TM:Transil is a trademarks of STMicroelectronics.

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25\text{ }^{\circ}\text{C}$)

Symbol	Parameter	Value	Unit
P_{PP}	Peak pulse power dissipation ⁽¹⁾	$T_{j\text{ initial}} = T_{amb}$ 5000	W
P	Power dissipation on infinite heatsink	$T_{amb} = 75\text{ }^{\circ}\text{C}$ 6.5	W
I_{FSM}	Non repetitive surge peak forward current for unidirectional types	$t_p = 10\text{ ms}$ $T_{j\text{ initial}} = T_{amb}$ 500	A
T_{stg}	Storage temperature range	-65 to +175	$^{\circ}\text{C}$
T_j	Maximum operating junction temperature	175	$^{\circ}\text{C}$
T_L	Maximum lead temperature for soldering during 10 s at 5 mm from case.	260	$^{\circ}\text{C}$

1. For a surge greater than the maximum values, the diode will fail in short-circuit.

Table 2. Thermal resistances

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to leads	15	$^{\circ}\text{C/W}$
$R_{th(j-a)}$	Junction to ambient on printed circuit. $L_{lead} = 10\text{ mm}$	65	

Figure 1. Electrical characteristics - definitions

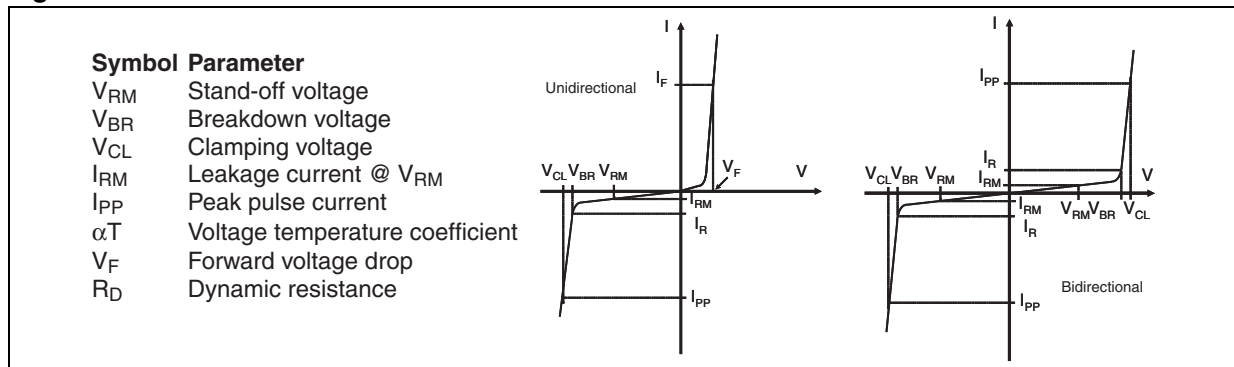


Figure 2. Pulse definition for electrical characteristics

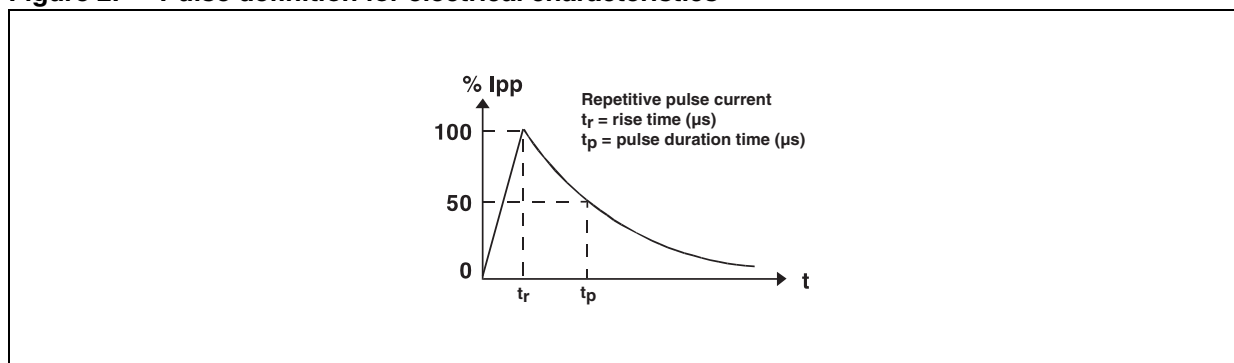


Table 3. Electrical characteristics - values ($T_{amb} = 25\text{ }^{\circ}\text{C}$)

Order code		I_{RM} @ V_{RM}		V_{BR} @ $I_R^{(1)}$		V_{CL} @ I_{PP} 10/1000 μs		V_{CL} @ I_{PP} 8/20 μs		$\alpha T^{(2)}$	$C^{(3)}$
		max		min		max		max		max	typ
Unidirectional	Bidirectional	μA	V	V	mA	V	A	V	A	$10^{-4}/^{\circ}\text{C}$	pF
BZW50-10	BZW50-10B	5	10	11.1	1	18.8	266	23.4	2564	7.8	24000
BZW50-12	BZW50-12B	5	12	13.3	1	22	227	28	2143	8.4	18500
BZW50-15	BZW50-15B	5	15	16.6	1	26.9	186	35	1714	8.8	13500
BZW50-18	BZW50-18B	5	18	20	1	32.2	155	41.5	1446	9.2	11500
BZW50-22	BZW50-22B	5	22	24.4	1	39.4	127	51	1177	9.6	8500
BZW50-27	BZW50-27B	5	27	30	1	48.3	103	62	968	9.8	7000
BZW50-33	BZW50-33B	5	33	36.6	1	59	85	76	789	10	5750
BZW50-39	BZW50-39B	5	39	43.3	1	69.4	72	90	667	10.1	4800
BZW50-47	BZW50-47B	5	47	52	1	83.2	60.1	108	556	10.3	4100
BZW50-56	BZW50-56B	5	56	62.2	1	99.6	50	129	465	10.4	3400
BZW50-68	BZW50-68B	5	68	75.6	1	121	41	157	382	10.5	3000
BZW50-82	BZW50-82B	5	82	91	1	145	34	189	317	10.6	2600
BZW50-100	BZW50-100B	5	100	111	1	179	28	228	263	10.7	2300
BZW50-120	BZW50-120B	5	120	133	1	215	23	274	219	10.8	1900
BZW50-150	BZW50-150B	5	150	166	1	269	19	343	175	10.8	1700
BZW50-180	BZW50-180B	5	180	200	1	322	16	410	146	10.8	1500

1. Pulse test: $t_p < 50\text{ ms}$.

2. $\Delta V_{BR} = \alpha T \cdot (T_{amb} - 25) \cdot V_{BR}(25^{\circ}\text{C})$.

3. $V_R = 0\text{ V}$, $F = 1\text{ MHz}$. For bidirectional types, capacitance value is divided by 2.

Figure 3. Peak power dissipation vs. initial junction temperature (printed circuit board)

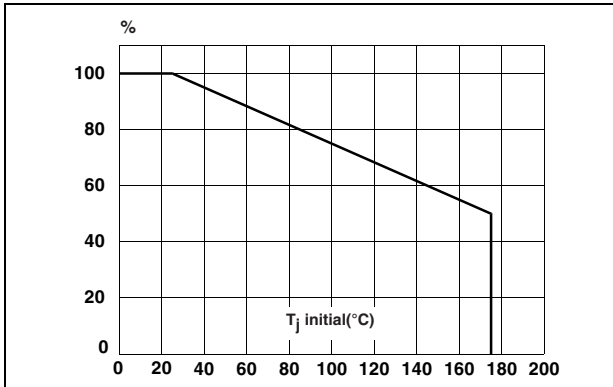


Figure 4. Peak pulse power vs. exponential pulse duration

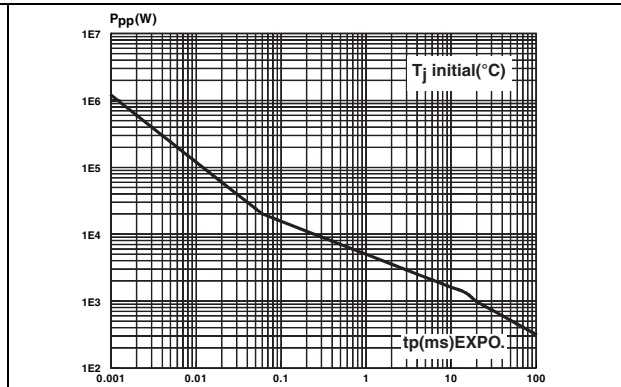


Figure 5. Clamping voltage vs. peak pulse current⁽¹⁾


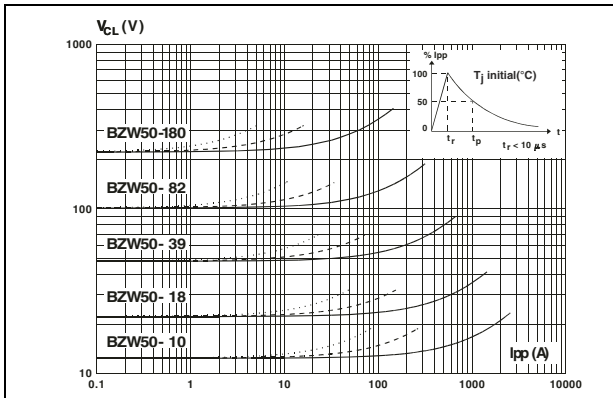


Figure 6. Capacitance vs. reverse applied voltage for unidirectional types (typical values).

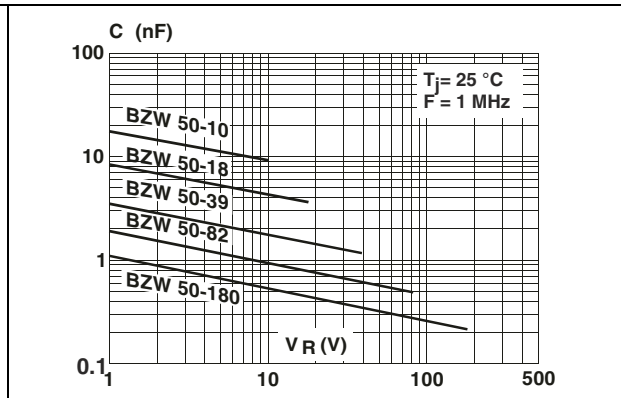

1. The curves in [Figure 5](#) are specified for a junction temperature of 25 °C before surge. The given results may be extrapolated for other junction temperatures by using the following formula: $\Delta V_{BR} = \alpha T \times [T_{amb} - 25] \times V_{BR}(25 \text{ °C})$
For intermediate voltages, extrapolate the given results.

Figure 7. Capacitance vs. reverse applied voltage for bidirectional types (typical values)


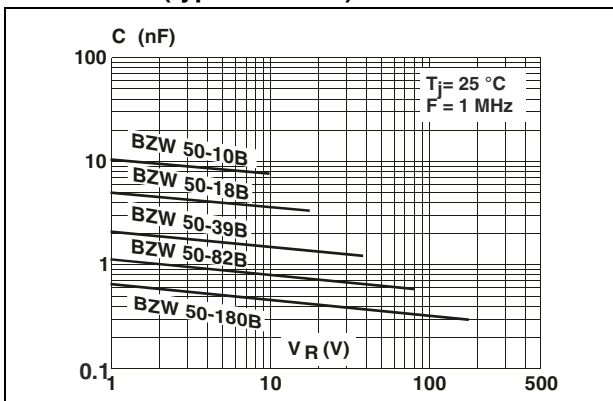


Figure 8. Peak forward voltage drop vs. peak forward current for unidirectional types (typical value).⁽¹⁾

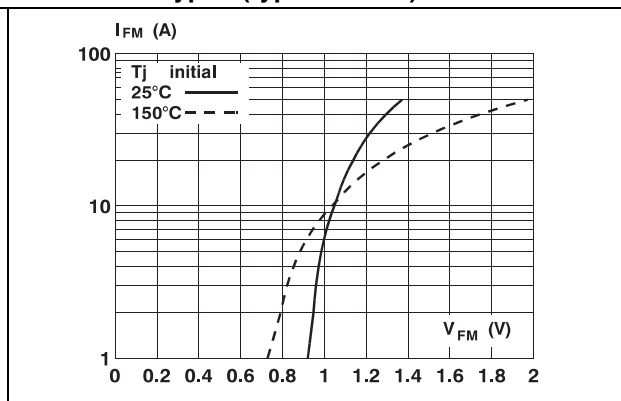

1. Multiply by 2 for units with $V_{BR} > 220 \text{ V}$.

Figure 9. Transient thermal impedance junction to ambient vs. pulse duration



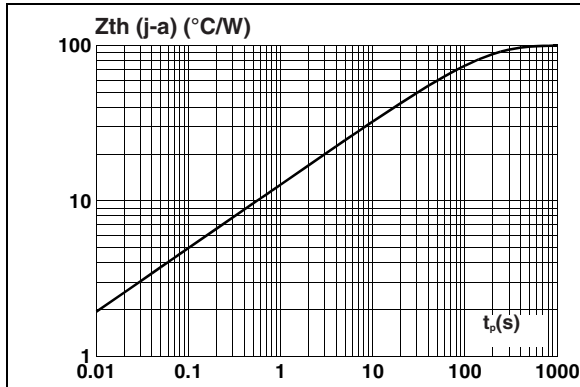


Figure 10. Relative variation of leakage current vs. junction temperature

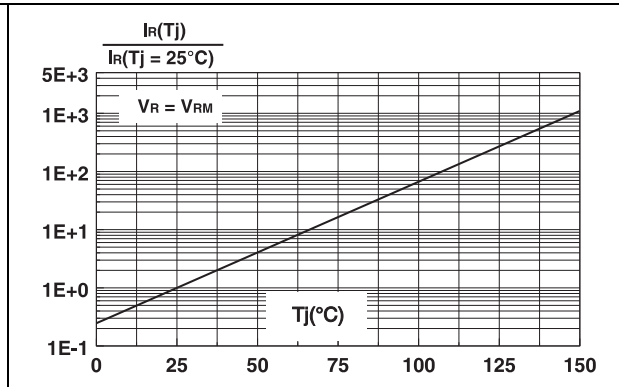

2 Ordering information scheme

Figure 11. Ordering information scheme

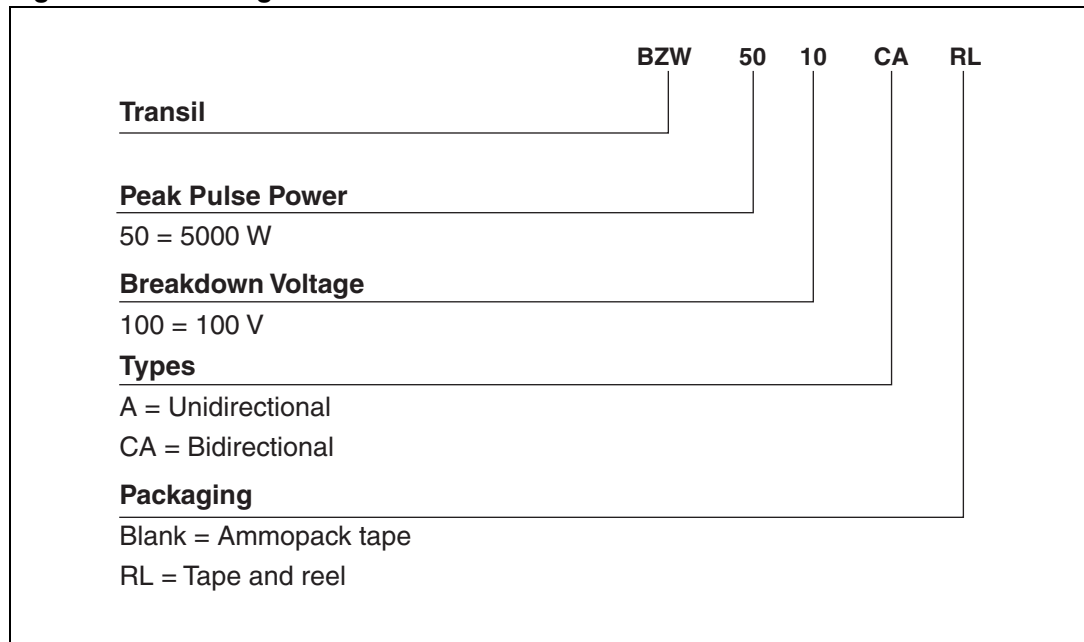

3 Package information

- Epoxy meets UL94, V0
- Lead-free package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

Table 4. R6 Dimensions

	Ref.	Dimensions			
		Millimeters		Inches	
		Min.	Max.	Min.	Max.
	A	8.6	9.1	0.338	0.358
	B	25.4		1	
Ø C	8.6	9.1	0.338	0.358	
Ø D	1.2	1.3	0.047	0.051	

Table 5. Marking

Unidirectional order code	Marking	Bidirectional order code	Marking
BZW50-10	BZW50-10	BZW50-10B	BZW50-10B
BZW50-12	BZW50-12	BZW50-12B	BZW50-12B
BZW50-15	BZW50-15	BZW50-15B	BZW50-15B
BZW50-18	BZW50-18	BZW50-18B	BZW50-18B
BZW50-22	BZW50-22	BZW50-22B	BZW50-22B
BZW50-27	BZW50-27	BZW50-27B	BZW50-27B
BZW50-33	BZW50-33	BZW50-33B	BZW50-33B
BZW50-39	BZW50-39	BZW50-39B	BZW50-39B
BZW50-47	BZW50-47	BZW50-47B	BZW50-47B
BZW50-56	BZW50-56	BZW50-56B	BZW50-56B
BZW50-68	BZW50-68	BZW50-68B	BZW50-68B
BZW50-82	BZW50-82	BZW50-82B	BZW50-82B
BZW50-100	BZW50-100	BZW50-100B	BZW50-100B
BZW50-120	BZW50-120	BZW50-120B	BZW50-120B
BZW50-150	BZW50-150	BZW50-150B	BZW50-150B
BZW50-180	BZW50-180	BZW50-180B	BZW50-180B

4 Ordering information

Table 6. Ordering information

Order code	Marking ⁽¹⁾	Package	Weight	Base qty	Delivery mode
BZW50xxxx	See Table 5	R6	2.050g	1000	Tape and reel
BZW50xxxxB				100	Ammopack
BZW50xxxxRL					
BZW50xxxxBRL					

1. Logo, date code, type code, cathode band (for unidirectional types only).

5 Revision history

Table 7. Document revision history

Date	Revision	Changes
Feb-2003	4	Last update
14-Dec-2012	5	Updated ECOPACK statement.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics:

[BZW50-150](#) [BZW50-15B](#) [BZW50-12B](#) [BZW50-68B](#) [BZW50-33B](#) [BZW50-120B](#) [BZW50-39B](#) [BZW50-39](#) [BZW50-22](#) [BZW50-27](#) [BZW50-33](#) [BZW50-68](#) [BZW50-82](#) [BZW50-56](#) [BZW50-15](#) [BZW50-18](#) [BZW50-10](#) [BZW50-180](#) [BZW50-56B](#) [BZW50-180B](#) [BZW50-47B](#) [BZW50-150B](#) [BZW50-27B](#) [BZW50-82RL](#) [BZW50-39BRL](#) [BZW50-33BRL](#) [BZW50-150RL](#) [BZW50-180RL](#) [BZW50-100B](#) [BZW50-82B](#) [BZW50-22B](#) [BZW50-100](#) [BZW50-33RL](#) [BZW50-15RL](#) [BZW50-68RL](#) [BZW50-27RL](#)