





慈溪市万捷电子有限公司


CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

7.62XX-1.8
5.08XX
5.0XX

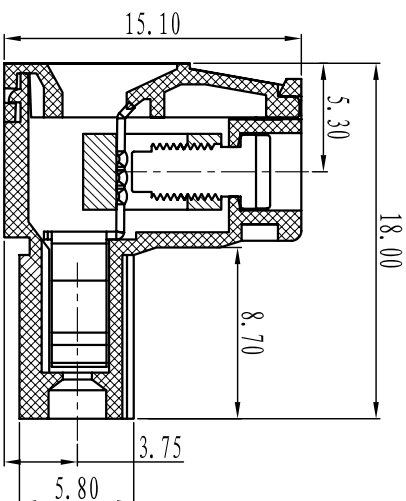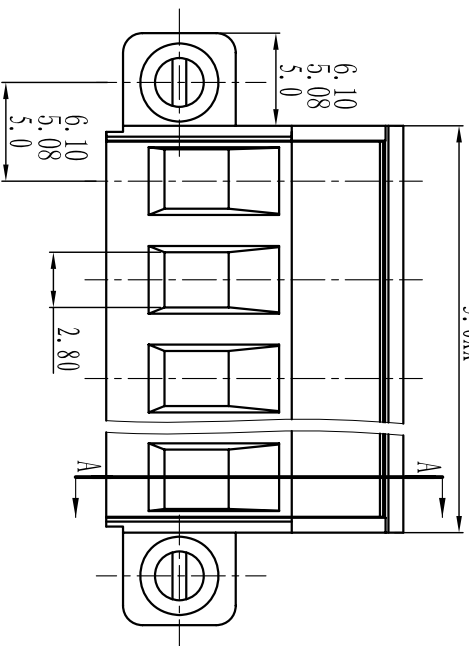

SECTION A-A

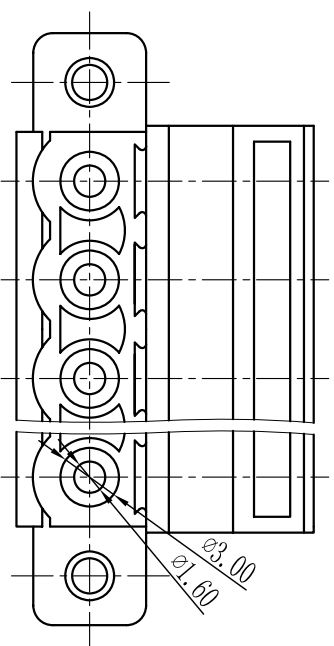

电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 320V
 额定电流/Rated current: 15A 20A
 接触电阻/Contact resistance: 20mΩ
 使用线径/Wire range: 28-14AWG 2.5mm²
 耐电压/Withstanding voltage: AC2000V/Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V
机械性能/Mechanical
 温度范围/Temp. Range: -40°C+105°C
 扭矩/Torque: 0.5Nm (4.51lb`in)
 剥线长度/Strip length: 7-8mm

尺寸/Dimensions

间距/Pitch: 5.00mm, 5.08mm, 7.62mm
 极数/Poles: 2P-24P


材质及电镀/Material

塑件/Housing: PA66, UL94V-0
 螺丝/Screws: M3.0, steel Zinc plated
 方块/Wire guard: Brass, Ni plated
 簧片/Clamp: Phosphor bronze, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension			fillet	chamfer	short angle sid						
variable range	6 to	6 to	6 to	all	6 to	10 to	50 to	120 to	all	5 to	30 to	120 to
tolerance	±0.1	±0.2	±0.3	±0.2	±0.5	±1	30'	20'	10'	0.5	0.025	0.06

订购方式：
HOW TO ORDER

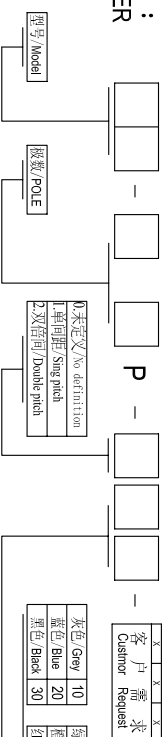

客户需求 Customer Request	
本色/Grey	10
蓝色/Blue	20
黑色/Black	30
绿色/Green	40
橙色/Orange	50
红色/Red	60
透明/Transparent	70
黄色/Yellow	80
白色/White	90

单位/UNITS	尺寸/SIZE	A4	比例/SCALE
mm			



第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME WJ2BDGKM-XXP-11Y-00A