



# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
product specification

### 电气性能/Electrical


参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 320V  
 额定电流/Rated current: 15A 20A  
 接触电阻/Contact resistance: 20m $\Omega$   
 使用线径/Wire range: 28-14AWG 2.5mm<sup>2</sup>  
 耐电压/Withstanding voltage: AC2000V/1Min  
 绝缘电阻/Insulation resistance: 500M $\Omega$ /DC500V

### 机械性能/Mechanical

温度范围/Temp Range: -40 $^{\circ}$ C<sup>+</sup>+105 $^{\circ}$ C  
 扭矩/Torque: 0.4Nm (3.61b`in)  
 剥线长度/Strip length: 7-8mm

### 尺寸/Dimensions


间距/Pitch: 5.00mm, 5.08mm  
 极数/Poles: 2P-24P  
 材料及电镀/Material  
 塑件/Housing: PA66, UL94V-0  
 螺丝/Screws: M3, 0. steel Nickel plated  
 方块/Wire guard: Brass, Ni plated  
 簧片/Clamp: Phosphor bronze, Ni plated

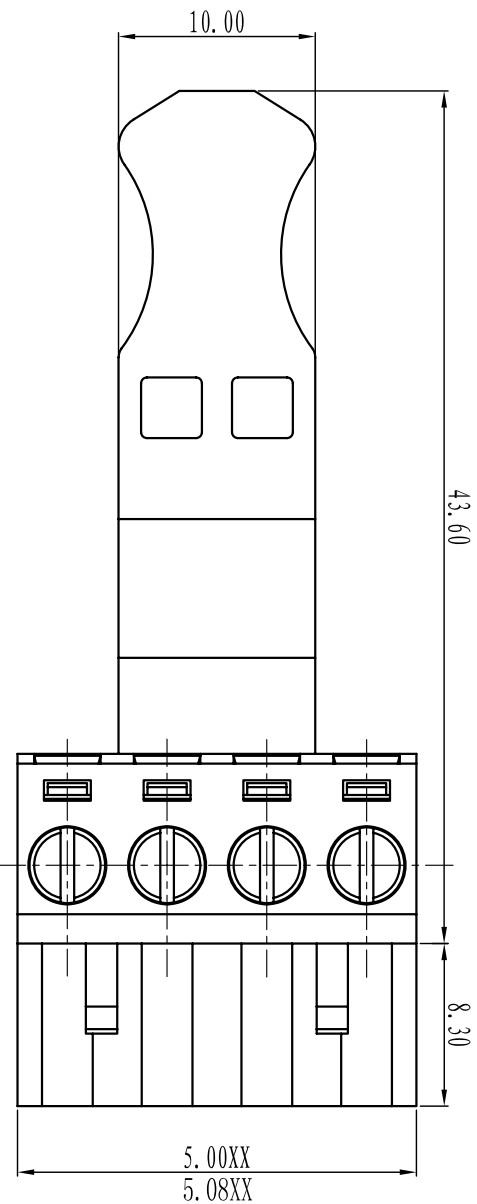

TOLERANCES EXCEPT AS NOTED

	Linear dimension		Fillet	chamfer	short angle sid	≡	—	//	⊥
variable range	6 to	over 30 to	all	over 6 to	over 10 to	all	over 5 to	over 30 to	over 120 to
tolerance	±0.1	±0.2	±0.2	±0.5	±1 $^{\circ}$	0.5	0.025	0.06	0.12 0.4

### 订购方式: HOW TO ORDER

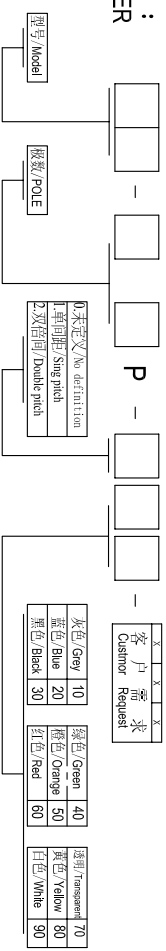

单位/UNITS	尺寸/SIZE	A4	比例/SCALE
----------	---------	----	----------

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME WJ2EDGNZ-XXP-1YY-00A